

Construction and Gauge	Tufted 5/32" cut pile	
Pile Content	100% PP Stainsafe®	
Primary Backing	Woven Polypropylene	
Secondary Backing	(1) Action back	(2) Ultratex® back
Pile Weight	1050 gr/m²	
Total Weight	(1) 1900 gr/m²	(2) 2080 gr/m²
Pile Height	9,5 mm	
Total Height	(1) 12 mm	(2) 13 mm
Tuft Density	82500/m²	
Widths available	4 & 5 metres	
Pattern Repeat	n/a	
Light Fastness	≥ 5-6	
Sound Insulation	(1) ≥ 26 dB	(2) ≥ 27 dB
Tog Rating	(1) 1.3	(2) 1.4
Fire Class	E _{FL} (EN 13501-1)	
Usage	Class 22	



INSTALLATION : Securely fix to subfloor with either the tackless gripper method with underlay or on the double stick method.

MAINTENANCE : Daily vacuum cleaning. Shampoo when necessary in accordance with manufacturer's instructions.

While every effort is made to ensure exact colour and design reproduction, we cannot, owing to method of manufacture, guarantee perfect matching. Please note that a sample may not be from the same dye batch as the current production and therefore should be used as a guide and not as an exact colour match.

Shading is a characteristic of all cut pile carpets and is not considered to be a manufacturing defect. Shades may vary from dye lot to dye lot. Experienced professional installers are essential to ensure correct installation.

THE COMPANY RESERVES THE RIGHT TO MODIFY SPECIFICATIONS AND ALTER RAW MATERIALS RELATIVE TO IMPROVING PERFORMANCE WITHOUT NOTICE.

A4 Folder Layout

630	915	935	955
695	945	955	
875	360	965	
995			




Noble Heathers

Finishing Touch




▲ 955 - Smoke

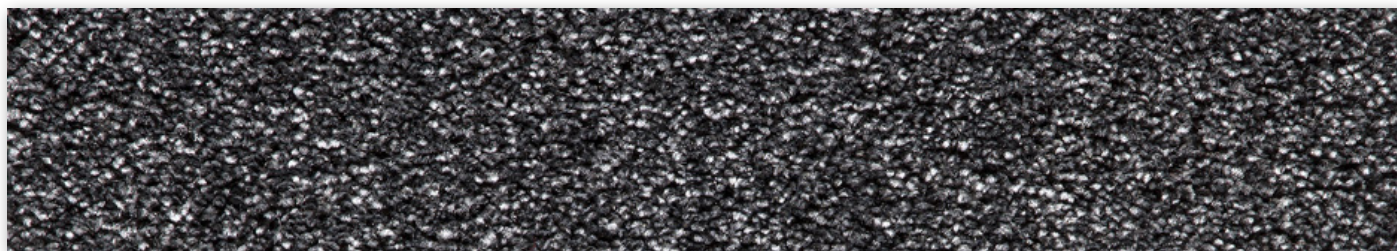

▲ 995 - Pirate Black




▲ 965 - Slate Grey

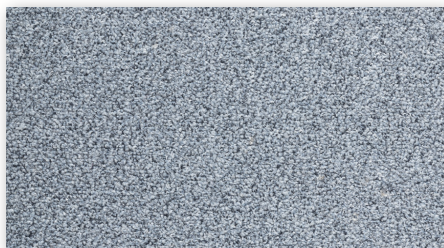

▲ 360 - Pigeon Blue



▲ 875 - Seal Brown

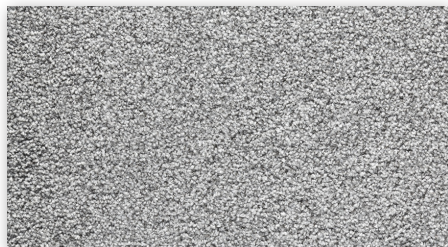

▲ 955 - Smoke



▲ 945 - Gull Grey



▲ 695 - Nightjar



▲ 935 - Coin



▲ 915 - Silver Grey



▲ 630 - Barley Beige